

DUPEX OR DOUBLE-SIDED FABRIC PRINTING MACHINE.

CONSTRUCTED BY MESSRS. HULSE AND CO., ENGINEERS, MANCHESTER.

(For Description, see Page 134.)

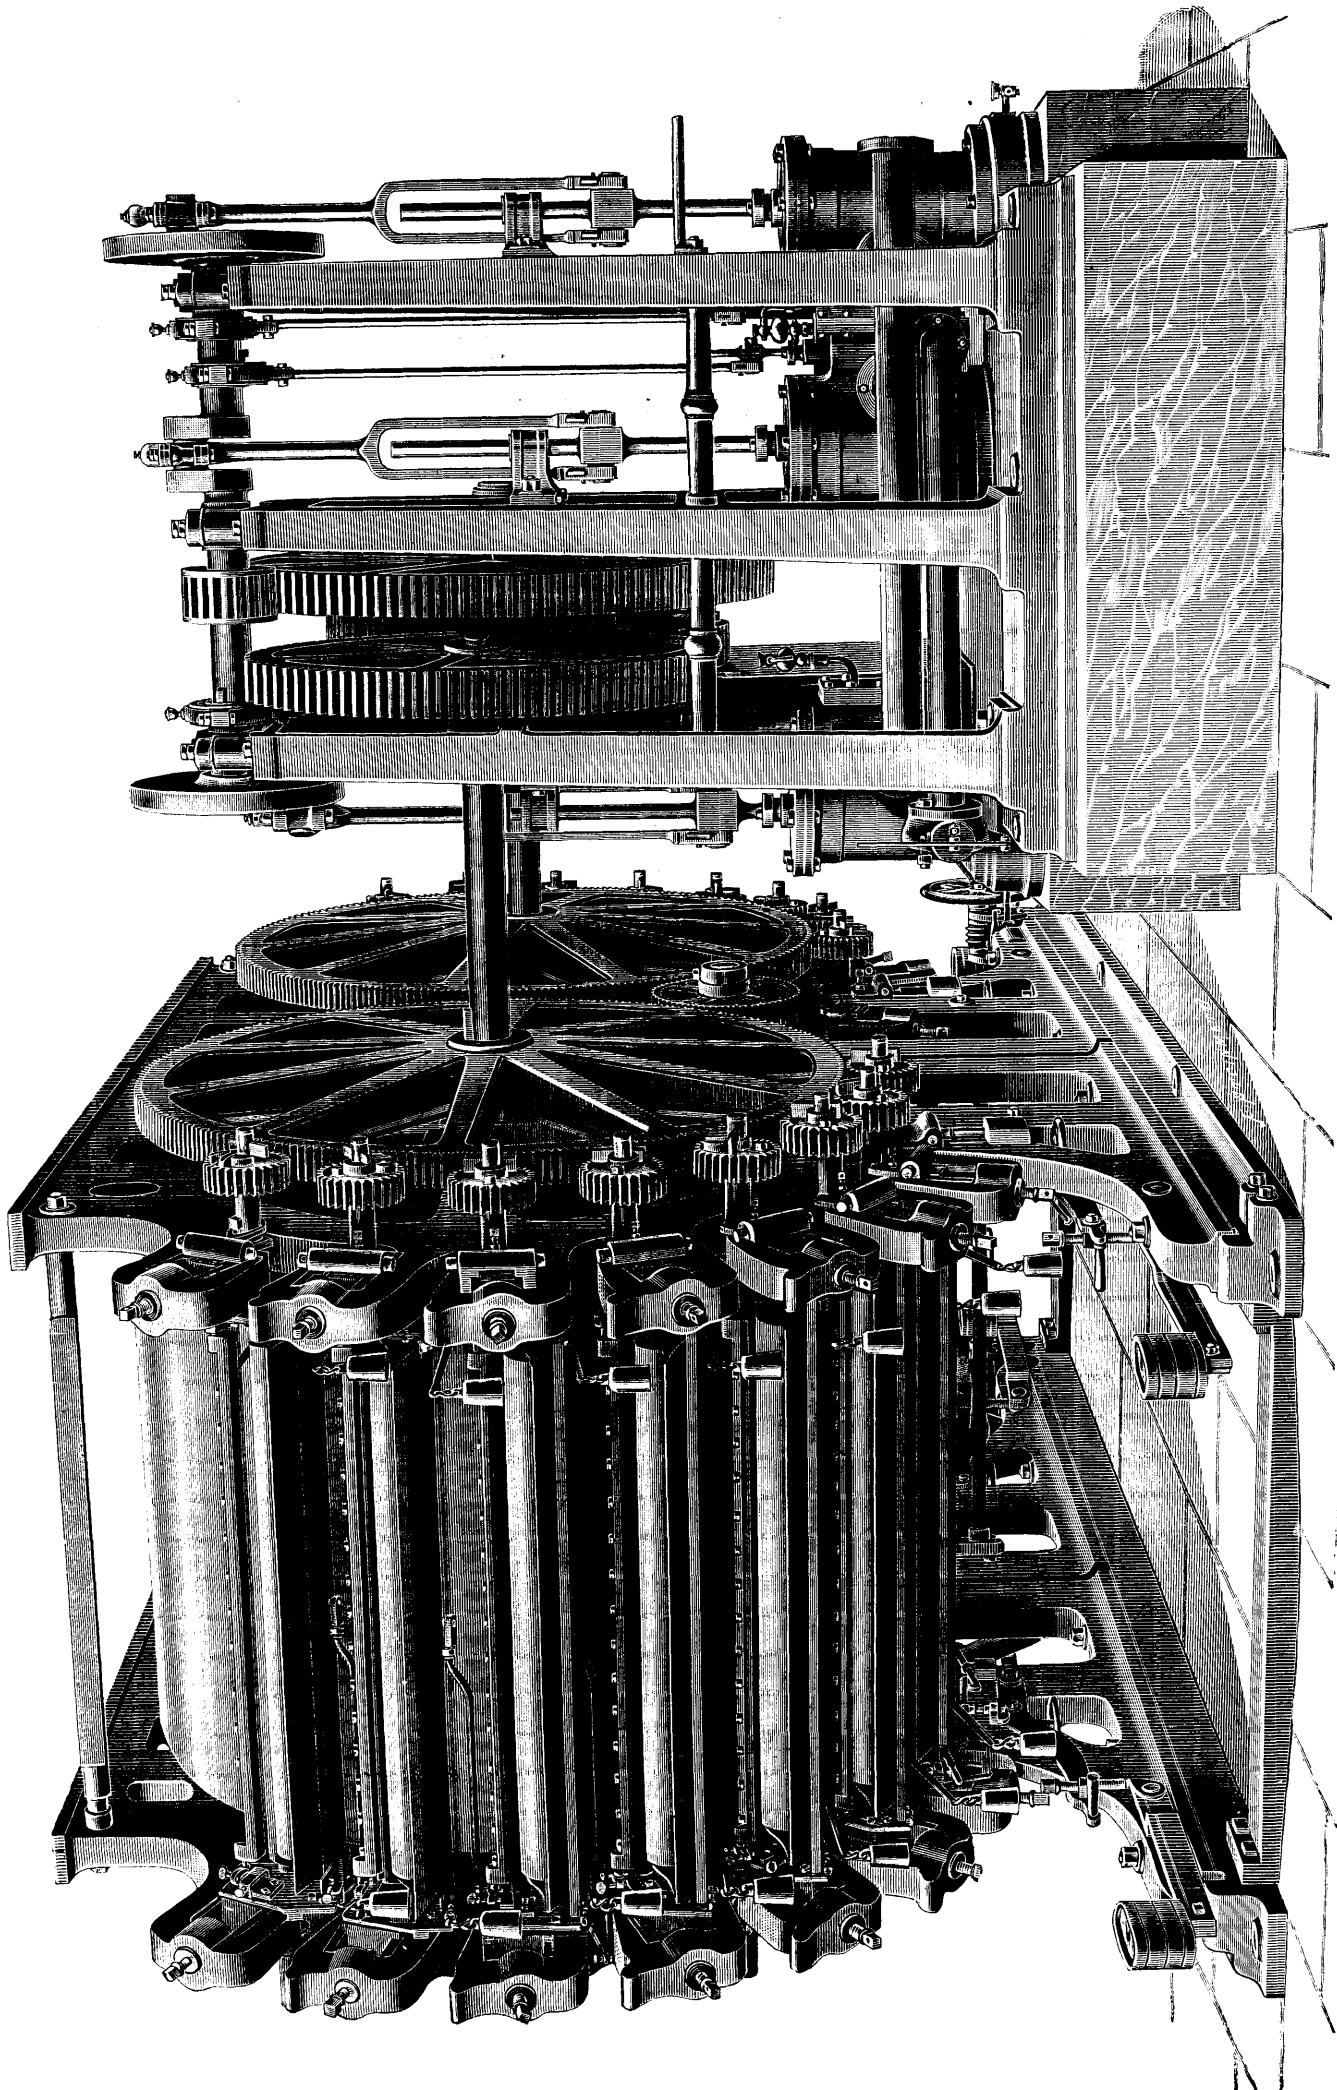


FIG. 67.

with each stream. Oxide of iron is used for purification, and removes all traces of hydrogen sulphide from the gas. The station meters, together with the governors for regulating the pressure of gas in the town mains, are situated in a building on the plot of land on the further side of the railway devoted to these and to cordoning the passage of 150,000 cubic feet of gas per hour. In this building are also fixed two sets of the gasholders. There are three meters for measuring the production of gas, each capable of re- engines and exhausters for exhausting the gas from